


نرخ تصویر و رزولوشن

IPC: 12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P/D1
HD-OUT: 3840×2160, 1920×1080, 1280×1024, 1024×768
VGA: 1920×1080, 1280×1024, 1280×720

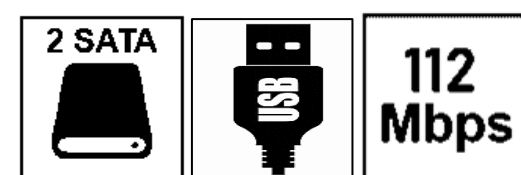


قابلیت سخت افزاری

In Band: 112 Mbps | Out Band: 112 Mbps
Internal HDD: 2 SATA Ports, up to 8TB for each HDD
USB: 2 ports (USB 2.0 x2)
Audio I/O: 1ch MIC in, 1ch Audio line out
RS232: Yes | Esata: N/A




ویدئو و آلام

Compression: H.265/H.264
Record Mode: Manual, Schedule (Regular, Continuous), Motion Detection,
Video Loss, Camera Tamper, Alarm in
Trigger Events: Recording, Buzzer, Push message, Pop up message
Video Detection: Motion Detection, Video Loss, Camera Tamper
Alarm In/Out: 8/1

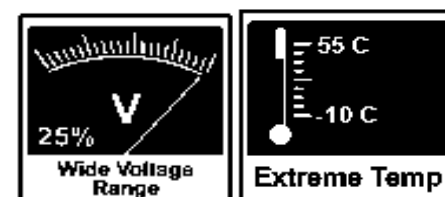

پاور و ضریب تحمل

DC12V/4A
Power Consumption: < 10W (without HDD)
Operating Conditions: -10 °C ~ 45 °C (14 °F ~ 113 °F)
Storage Conditions: Less than 90% RH



پروتکل و شبکه

Interface: 2 RJ-45 port (10M/100/1000 Mbps)
Network Function: HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP,
P2P, IP Filter, DDNS, 802.1X, SNMP
Max. User: Access 8 users
Interoperability: ONVIF, SDK



LGUARD LNR HD Network Recorder

Premium Series

Model:



LNR1602-PS

رکورد ۱۶ کانال تحت شبکه الگارد با پشتیبانی از حداکثر ۱۶ دوربین با رزولوشن ۱۲ مگاپیکسل و خروجی تصویر با کیفیت 4K و بهره مندی از رابط کاربری آسان برخوردار است. این دستگاه از دو هارد با حداکثر ظرفیت ۱۰ ترا بایت و قابلیت صدای دو طرفه را پشتیبانی می کند.



باز پخش و پشتیبان گیری

Sync Playback: 16/9/4/1
Search Mode: Time /Date, Alarm, Picture grid, Event
Playback Function:
Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Shuffle, Backup Selection, Digital Zoom
Backup Mode: USB Device

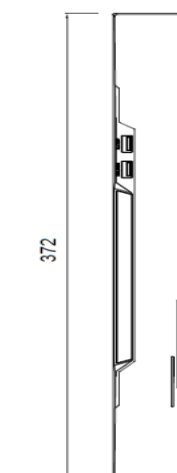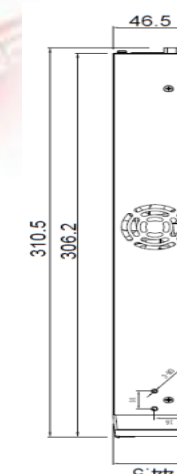

2900127200094



2241220b07760001



Web: www.lguard.ir