


LGUARD LNR HD Network Recorder

Premium Series

Model:

LNR3202

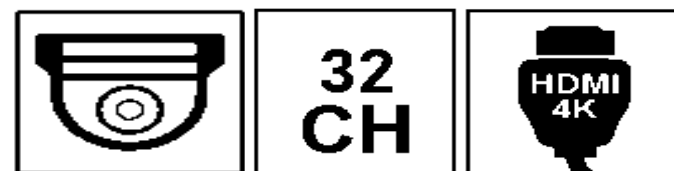


نرخ تصویر و رزولوشن

IPC: 8MP/6MP/5MP/4MP/3MP/1080P/720P/D1

HD-OUT: 1920×1080, 1440×900, 1280×1024

VGA: 1920×1080, 1280×1024, 1280×720

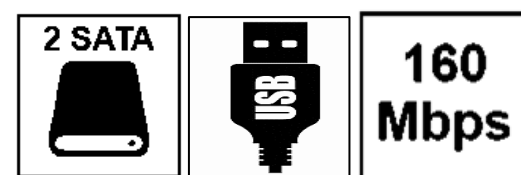

قابلیت سخت افزاری

Record Rate: 160 Mbps | Out Band: 80 Mbps

Internal HDD: 2 SATA Ports, up to 8TB for each HDD

USB: 2 ports (USB 2.0 x2)

Audio I/O: 1ch MIC in, 1ch Audio line out

RS232: Yes

Esata: N/A



ویدئو و آلام

Compression: H.265/H.264


Record Mode: Manual, Schedule (Regular, Continuous), Motion Detection,

Video Loss, Camera Tamper, Alarm in

Trigger Events: Recording, Buzzer, Push message, Pop up message

Video Detection: Motion Detection, Video Loss, Camera Tamper

Alarm In/Out: 8/1

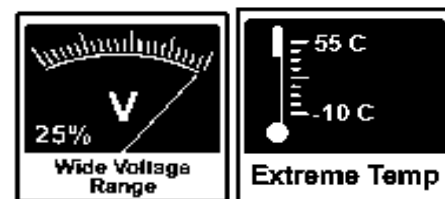


پاور و ضریب تحمل

DC12V/4A

Power Consumption: < 5W (without HDD)

Operating Conditions: -10 °C ~ 45 °C (14 °F ~ 113 °F)

Storage Conditions: Less than 90% RH



پروتکل و شبکه

Interface: 2 RJ-45 port (10M/100/1000 Mbps)

Network Function: HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP

Max. User: Access 8 users

Interoperability: ONVIF, SDK



رکوردر ۳۲ کانال تحت شبکه الگارد با پشتیبانی از حداکثر ۳۲ دوربین با رزولوشن ۸ مگاپیکسل و خروجی تصویر با کیفیت 4K و بهره مندی از رابط کاربری آسان برخوردار است. این دستگاه از دو هارد با حداکثر ظرفیت ۸ ترا بایت و قابلیت صدای دو طرفه را پشتیبانی می کند.

تولید ایران



باز پخش و پشتیبان گیری

Sync Playback: 16/9/4/1

Search Mode: Time /Date, Alarm, Picture grid, Event

Playback Function:

Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Shuffle, Backup Selection, Digital Zoom

Backup Mode: USB Device

